



EDGE ILLUMINATION SIGNS WITH LEDS

Lounge Light



> In models SLD-XX/SP, the new adjustable lighted legend mounting device, permits the mounting of the unit on walls or ceilings. By using the special extension rods (20, 40 cm), the units can also be mounted at a distance from the ceiling. Recess mounting on a suspended ceiling can be accomplished if the special mounting springs (contained in the package) are used.

> The edge illumination signs use a technology that is friendly towards the signenvironment due to its small consumption from the mains power supply. Each model combines modern esthetics and techno logical functionality. They are used in every area where public orientation and esthetics must be combined. These luminaires can be used as maintained illuminated signs.

> They consist of two pieces, the illuminated with the LEDs and the control circuit which is placed on the ceiling or the wall. They can also be recess mounted on a suspended ceiling using the mounting springs contained in the package.



- > The smallest profile on the market (only 1,5cm)
- > Double sided markings
- > High luminosity white LEDs with a great life span.
- > Surface or recess mounting capability
- > 3 hour duration with Ni-MH batteries
- > Friendly towards the environment
- > Test button - Charge indication LED
- > Markings according to ÅÍ-1838
- > Produced in accordance with European norms EN 60598-1, EN 60598-2-22

EDGE ILLUMINATION SIGNS WITH LEDs

SELF-TESTING, MAINTAINED EDGE ILLUMINATION SIGNS

TYPE	OPERATION VOLTAGE	CONSUMPTION	BATTERY NI-CID	DURATION	POWER OF Light Source	WEIGHT
EDIS-SLD-28/SP	220-240V AC/ 50-60Hz	7VA	3.6V /1.5Ah	3 hours	45/ 45 lm	1350 gr.
EDIS-SLD-34/SP	220-240V AC/ 50-60Hz	7VA	3.6V /1.5Ah	3 hours	55/ 55 lm	900.gr.
EDIS-SLD-44/SP	220-240V AC/ 50-60Hz	7VA	3.6V /1.5Ah	3 hours	55/ 55 lm	1650 gr.
EDIS-SLD-64/SP	220-240V AC/ 50-60Hz	8VA	3.6V /1.5Ah	3 hours	75/ 100 lm	2730 gr.

SELF-TESTING, MAINTAINED EDGE ILLUMINATION SIGNS

EDIS-SLD-28/DZ	220-240V AC/ 50-60Hz	7VA	-----	3 hours	45/ 45 lm	900 gr.
EDIS-SLD-34/DZ	220-240V AC/ 50-60Hz	7VA	-----	3 hours	55/ 55 lm	1650 gr.
EDIS-SLD-44/DZ	220-240V AC/ 50-60Hz	8VA	-----	3 hours	55/ 55 lm	1350 gr.

EDGE ILLUMINATION SIGNS FOR CENTRAL UNITS 230V AC

EDIS-SLD-28/CBS/SP	220-240V AC/ 50Hz	7VA	-----	-----	45 lm	980 gr.
EDIS-SLD-34/CBS/SP	220-240V AC/ 50Hz	7VA	-----	-----	55 lm	1080 gr.
EDIS-SLD-44/CBS/SP	220-240V AC/ 50Hz	7VA	-----	-----	55 lm	1700 gr.
EDIS-SLD-64/CBS/SP	220-240V AC/ 50Hz	8VA	-----	-----	100 lm	2630 gr.

EDGE ILLUMINATION SIGNS FOR CENTRAL UNITS 230V AC



EDIS-SLD-28/CBS/DZ	110V-240V AC/DC	7VA	-----	-----	45 lm	980 gr.
EDIS-SLD-34/CBS/DZ	110V-240V AC/DC	7VA	-----	-----	55 lm	1080 gr.
EDIS-SLD-44/CBS/DZ	110V-240V AC/DC	7VA	-----	-----	55 lm	1700 gr.
EDIS-SLD-64/CBS/DZ	110V-240V AC/DC	8VA	-----	-----	100 lm	2500 gr.

ACCESSORIES

ED15-A-1080 10cm extension rod ED15-A-1082 40cm extension rod
 ED15-A-1081 20cm extension rod ED15-A-1083 Connection tie


TYPE: RECESS MOUNTING BASE

SLD-28/DZ, SLD 28/SP : 36 x 22,5 x 5 cm
 SLD-34/DZ, SLD 34/SP : 36 x 22,5 x 5 cm
 SLD-44/DZ, SLD 44/SP : 48 x 32 x 5 cm
 SLD-64/DZ, SLD 64/SP : 48 x 32 x 8.5 cm

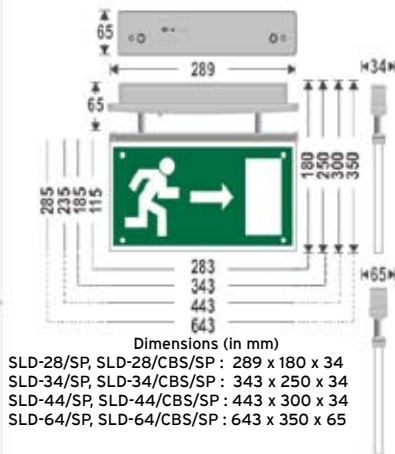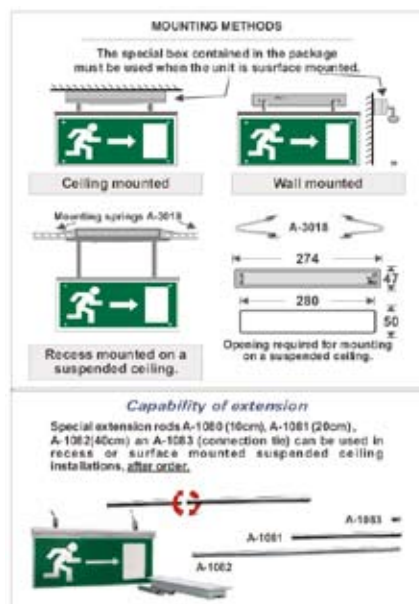

Marking overlay contained in the package. Please define during the order the type of sign. The desired overlay is placed on the lighted panel using special mounting accessories (screws) which are also included

MARKING OVERLAY

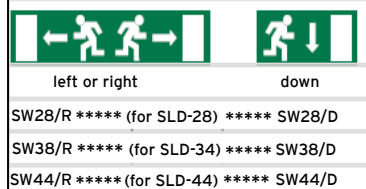

LEDs of high luminosity



3 hours



Ni-Cd 3.6V/1Ah



16 m. ED-28
 30 m. ED-34
 34 m. ED-44



3 years guarantee (1 year for battery)



We reserve the right to make changes at any time in order to maintain the highest product quality.