



WATERPROOF EMERGENCY LUMINAIRES WITH LEDs

Spot Light-Weather Spot Light



Spot Light

- > The "Spot Light" series consists of emergency luminaires which can be either surface or recess mounted on ceilings. Apart from the high efficiency light output, LEDs also have a greater life span. Due to these advantages, these luminaires do not require a lamp replacement during their service life.
- > The GR-90, GR-95, GR-96 are self-testing, maintained luminaires.
- > The GR-94, GR-286, GR-287 are simple mains operated luminaires. They don't contain batteries and can operate using the mains power supply or central battery systems.
- > They are IP 65 class rated and can be used in exterior applications.

- > The luminaires from the "Weather Spot Light" series are mounted in standardized electrical switch boxes, suitable for plaster boards. All types are water-proof with an IP rating of 65, and can be used in external areas.



Weather Spot Light




WATERPROOF EMERGENCY LUMINAIRES WITH LEDs

WATERPROOF, SELF-TESTING, NON-MAINTAINED CEILING MOUNTED LUMINAIRES WITH LEDs

TYPE	OPERATION VOLTAGE	CONSUMPTION	BATTERY NI-CID	DURATION	LIGHT SOURCE	LIGHT OUTPUT	WEIGHT
EDI5-GR-95	220-240V AC/ 50-60Hz	3VA	3.6V/1.5 Ah	3 hours	20 LEDs (white)	65 lm	380 gr.

WATERPROOF CEILING MOUNTED LUMINAIRES WITH LEDs FOR CBS

TYPE	OPERATION VOLTAGE	CONSUMPTION	LIGHT SOURCE	LIGHT OUTPUT	WEIGHT
EDI5-GR-286	220-240V AC/ 50-60Hz	5VA	20 LEDs (white)	75 lm	380 gr.
EDI5-GR-286	220-240V AC/ 50-60Hz	8VA	40 LEDs (white)	150 lm	380 gr.
EDI5-GR-94	220-240V AC/ 50-60Hz	6VA / 3W	1W LED	60 lm	380 gr.

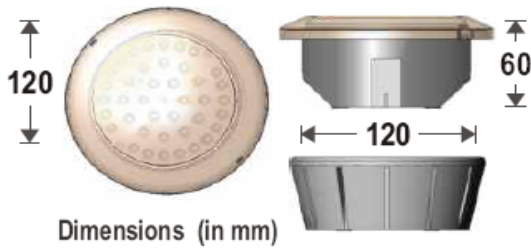


1W LED
GR-94



WATERPROOF CEILING MOUNTED LUMINAIRES WITH LEDs FOR CBS

TYPE	OPERATION VOLTAGE	CONSUMPTION	LIGHT SOURCE	LIGHT OUTPUT	WEIGHT
EDI5-GR-80/W	220-240V AC/ 50-60Hz	6VA	9 LEDs (white)	30 lm	150 gr.
EDI5-GR-80/SL	220-240V AC/ 50-60Hz	6VA	9 LEDs (white)	30 lm	150 gr.
EDI5-GR-80/B	220-240V AC/ 50-60Hz	6VA	9 LEDs (blue)	5 lm	150 gr.
EDI5-GR-80/G	220-240V AC/ 50-60Hz	6VA	9 LEDs (green)	14 lm	150 gr.
EDI5-GR-80/R	220-240V AC/ 50-60Hz	6VA	9 LEDs (red)	7 lm	150 gr.
EDI5-GR-80/Y	220-240V AC/ 50-60Hz	6VA	9 LEDs (yellow)	3 lm	150 gr.

"Weather Spot Light"



LEDs of high luminosity



3 hours



Ni-Cd 3.6V/1.5Ah



IP 65

3 years guarantee (1 year for battery)





EMERGENCY LUMINAIRES WITH LEDs

"Weather Spot Light"



- > 4 white LEDs in emergency operation.
- > 3 hours duration.
- > Charge indication LED.
- > Battery Ni-MH 3.6V/120mAh

Accessory contained in the package : protective grid suitable for installing the luminaires from the "Weather Spot Light" series, in stairs.



SLAVE, WALL MOUNTED LUMINAIRES WITH LEDs "WEATHER SPOT LIGHT" IP 40

TYPE	OPERATION VOLTAGE	CONSUMPTION	LIGHT SOURCE	LIGHT OUTPUT	WEIGHT
EDI5-GR-81/W	12V AC/ DC	100 / 60 mA	9 LEDs (white)	30 lm	150 gr.
EDI5-GR-81/W/SL	12V AC/ DC	100 / 60 mA	9 LEDs (white)	30 lm	150 gr.
EDI5-GR-81/B	12V AC/ DC	100 / 60 mA	9 LEDs (blue)	5 lm	150 gr.
EDI5-GR-81/G	12V AC/ DC	100 / 60 mA	9 LEDs (green)	14 lm	150 gr.
EDI5-GR-81/R	12V AC/ DC	100 / 60 mA	9 LEDs (red)	7 lm	150 gr.
EDI5-GR-81/Y	12V AC/ DC	100 / 60 mA	9 LEDs (yellow)	3 lm	150 gr.

NON-MAINTAINED, WALL MOUNTED LUMINAIRE WITH BATTERY 3,6V/120mAh & 3 HOURS DURATION IP 40

TYPE	OPERATION VOLTAGE	CONSUM	BATTERY Ni - NH	DURATION	LIGHT SOURCE	LIGHT OUTPUT	WEIGHT
EDI5-GR-83	220-240V AC/ 50-60Hz	2VA	3.6V/120mAh	3 hours	9 LEDs (white)	15 lm	80 gr.

