



Benefits

- Vandal-resistant PC fronts
- Powered by Seoul Semi P4 & P5
- Weatherproof to IP67
- 700mA MAX Drive current
- Tough & Durable machined aluminium housing.

Applications

- Retail Lighting
- Restaurants, Bars and Hotels
- Architectural Lighting
- Display Lighting



Features

Lumen Output	480 S/C
Wattage	1.2Watts per channel
Input Power	240 Volts
Efficacy	160 Lum/Watt
Color Temperature (CCT)	3100k - 6500k
Color Rendering Index (CRI)	85
Beam Spread	N-M-W
Rated Life	50,000 Hrs
LEDs	Seoul Semi P4 & P5
Housing	Machined Aluminium
Mounting Options	Surface
Dimensions	152Dia x 73Dia
Power Supply	350mA 700mA DMX
Voltage	12-30 Volts
Warranty	2 Years
Environment	IP67

ERATO

Weights & Thermal Data

Lamp Type	Weight (kg)	Minimum Operating Temp (-10°C)	Maximum Ambient Temp (+40°C)
LED	1.2Kg		

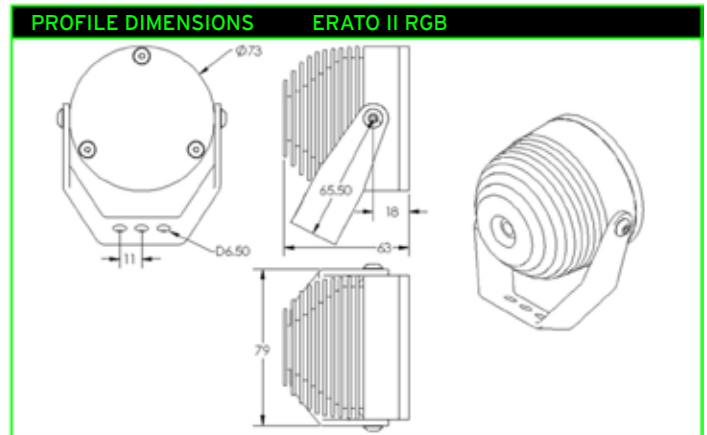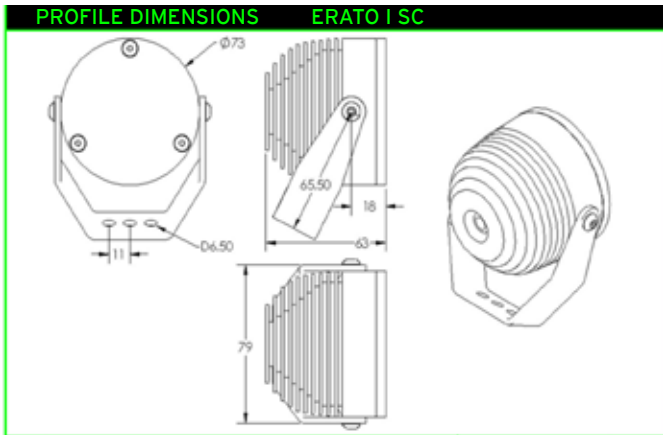

Recommended Drivers

Model

ED55-D10CC350-1-7IP67

ED55-D18CC700-3-6IP67

Description

ERATO I is a high powered miniature flood light, using the latest LED and optic technology incorporating 3 high power Seoul Semiconductor P4 LEDs, The unit offers excellent light output for various applications including wall lighting mood and effect lighting, architectural lighting or garden and ornamental lighting theatre stage lighting or bar and club venues The unit is available in a variety of single LED colours and can be mounted to floors, ceilings or walls using the bracket provided to create any mood or effect. The unit is IP67 rated for indoor or outdoor use. A ground spike is also available for soft ground installations

Recommended Drivers

Model

ED55-DMX350mA-36

Description

ERATO II RGB is a high powered miniature flood light, It is a high-powered wall mounting miniature flood light, using the latest RGB-LED and optic technology incorporating 3 high power Seoul Semiconductor P5 LEDs, the RGB colour mixing is outstanding (3 LED dies on one LED so essentially there are 9 LEDs) and therefore minimises fringing and separation of colours. As a result the colour mixing of the ERATO II RGB is outstanding. The unit offers excellent light output for various applications including wall lighting mood and effect lighting, architectural lighting or garden and ornamental lighting theatre stage lighting or bar and club venues The unit is available in a variety of single LED colours and can be mounted to floors, ceilings or walls using the bracket provided to create any mood or effect. The unit is IP67 rated for indoor or outdoor use. A ground spike is also available for soft ground installations

Order Details

Description Code	Lense Deg 6-15-25			Colour Option								
	N	M	W	C/W	N/W	W/W	R	G	B	A	RGB	
ERATO SC												
ED55-ERATO 1												
ED55-ERATO II RGB												
*		*		*								

Example Order(*) ED55-ERATO-1-M-C/W

Available Light Output Colours



We reserve the right to make changes at any time in order to maintain the highest product quality.

The Fountain Business Park Ellis Street Coatbridge ML5 3AA
Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
Phone: 07905 565604 Email: sales@edenillumination.com

Web: www.edenillumination.com

ERATO REV-A SEP-2009

