



Features

Lumen Output	1080 to 4720 Lumens
Watts	14 to 65 max for 600x1200mm
Input Power	AC 100 ~ 240V, 50/60Hz
Efficacy	70 Lumens/watt Nominal
Color Temperature (CCT)	3500k - 6500k
Color Rendering Index (CRI)	88
Rated Life	50,000 Hrs +
LEDs	High-efficiency LEDs
Housing	Aluminium + PMMA LGP
Mounting Options	Recessed-Surface-Suspended
Dimensions	300 to 600mm Wide X 300 to 1200mm Length
Power Supply	Constant Current
Voltage	DC 36 VOLT
Warranty	5 Years - Driver
Certification	RoHS, EMC, CE, UL
Environment	IP44

Benefits


SUPERIOR LUMINANCE, POWER SAVING, ENVIRONMENTALLY FRIENDLY, EXCEPTIONAL LIFESPAN.

- Anti-glare LED Lighting- LCD TFT Backlight Technology.- 3D -V-Cut Lighting Guide Panel- No dazzle ! No UV !
- Luminance efficiency of Max 75 Lumens/watt, the industry's highest for LED Lighting
- Light output equivalent to conventional fluorescent fixtures that use twin 40-watt straight-tube fluorescent lamps.
- Power consumption is reduced by approximately 75%
- Long life span in excess of 50,000 hours
- Unlimited design and various sizes are available
- New inner high efficiency (95%) constant current driver, with heat protection system, can work under unstable voltage
- Dimmable and Emergency Versions Available
- Unlimited Design and various sizes are available


Applications

- Architectural Lighting
- Schools, Colleges & Universities
- Residential / Institution Buildings
- Hospitals
- Retail
- Offices
- Hotels, Conference / Meeting Rooms
- Commercial Complexes
- Coloured one available for Clubs Bars

CORVUS

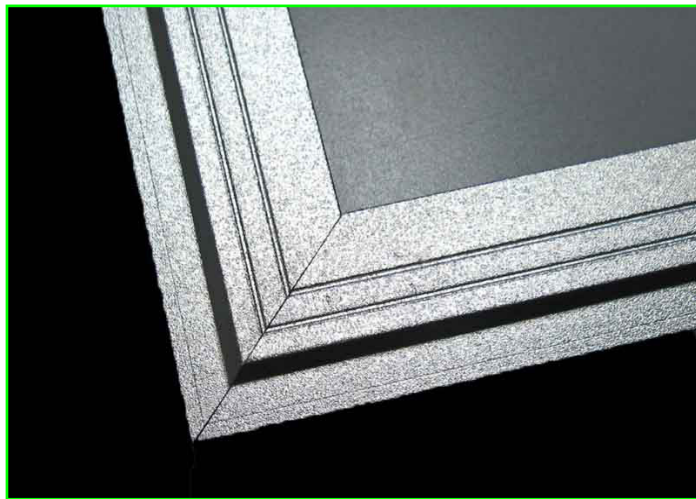

Light Distributions

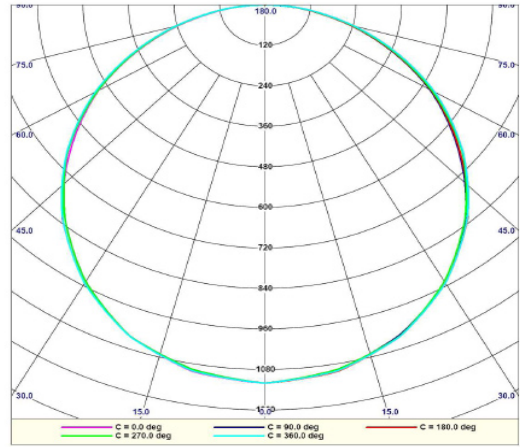

Weights & Thermal Data

Lamp Type	Weight (kg)	Minimum Operating Temp (-30°C)	Maximum Ambient Temp (+45°C)
LED	5.6Kgs		

PANEL SIZE

Model	Watts	Lumens	LED Colours
300 X 300mm	17	1200lm	C/W N/W W/W
600 X 300mm	15	1080lm	C/W N/W W/W
600 x 300mm	23	1590lm	C/W N/W W/W
600 x 600mm	30	2160lm	C/W N/W W/W
600 x 600mm	45	3180lm	C/W N/W W/W
1200 x 300mm	45	3180lm	C/W N/W W/W
1200 x 600mm	65	4720lm	C/W N/W W/W



Order Details

Description Code	Type			Mounting Options		PANEL SIZE				LED Colours Available		
	Standard	Dimmable	Emergency	Mounted	Suspended	300 x 300mm	600 x 600mm	300 x 1200mm	600 x 1200mm	Cool White	Neutral White	Warm White
CORVUS	Standard	Dimmable	Emergency	Mounted	Suspended	300 x 300mm	600 x 600mm	300 x 1200mm	600 x 1200mm	Cool White	Neutral White	Warm White
ED61-CORV	S	D	EM	M	Su	30	60	312	612	C/W	N/W	W/W
*			*		*			*		*		

Example Order ED61-CORV-EM-Su-312-C/W

We reserve the right to make changes at any time in order to maintain the highest product quality.

The Fountain Business Park Ellis Street Coatbridge ML5 3AA
Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
Phone: 07905 565604 Email: sales@edenillumination.com

Web: www.edenillumination.com

