



Features

Lumen Output	1100 Lumens
Wattage	10-12-15-18Watt Customisable
Input Power	200 to 240 Volts
Efficacy	65 Lum/Watt
Color Temperature (CCT)	3100k - 6500k
Color Rendering Index (CRI)	85
Beam Spread	120Degs
Rated Life	50,000 Hrs
LEDs	CREE
Emergency Duration	3 Hrs
Battery	9.6V 4AH Ni-MH rechargeable battery
Charge time	< 12Hours
Housing	Aluminium-PC
Mounting Options	Surface
Dimensions	280-Dia x 100 And 300sq
Power Supply	350mA 12V
Warranty	5 Years
Environment	IP65
Approvals	CE Approved and ROHS Compliant



KYRO


Applications

- Retail Lighting
- Restaurants, Bars and Hotels
- Architectural Lighting
- Display Lighting
- Energy Efficient - typically 30% more efficient than fluorescent luminaires
- Replaces 2D 28W fluorescent but only consumes 15W
- No through life maintenance
- 50 000 hrs life, 70% lumen maintenance
- Sealed to IP65
- No mercury, no disposal issues or costs

KYRO

Weights & Thermal Data

Lamp Type	Weight (kg)	Minimum Operating Temp (-20°C)	Maximum Ambient Temp (+50°C)
LED	1.05Kg		

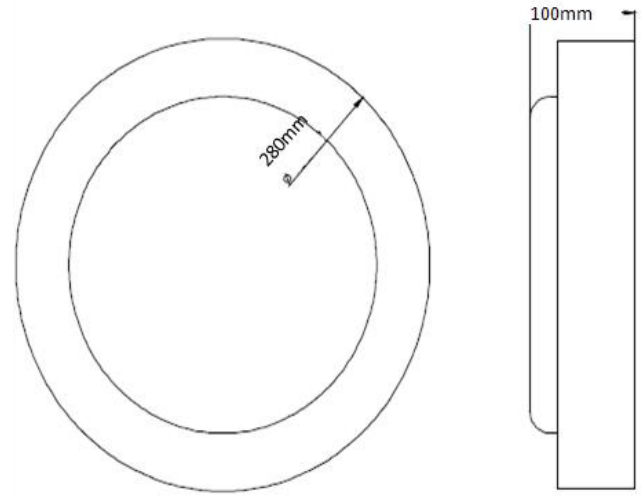

KYRO-Square Also Available 315 x 315 x 100mm



Order Details

Description Code	Product			Wattage				LED Colour Option			Shape		
	Standard	Sensor	Emergency	10W	12W	15W	18W	WarmWhite	Neutral White	Cool White	Square-C	Round-A	Round-B
KYRO	ST	SE	EM	10	12	15	18	WW	NW	CW	SQ	RA	RB
KYRO													
*		*	*	*						*		*	
Example Order ED84-KYRO-SE-EM-10-CW-RA													

We reserve the right to make changes at any time in order to maintain the highest product quality.

The Fountain Business Park Ellis Street Coatbridge ML5 3AA
 Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
 Phone: 07905 565604 Email: sales@edenillumination.com

KYRO-REV-A NOV-2010

Web: www.edenillumination.com

© Copyright www.edenilluminations.com

