



TREMOR

Applications:

- Outdoor floodlighting,
- Architecture lighting,
- Car parks lighting,
- Industrial lighting,
- Physical training center and stadiums
- Dock lighting, etc.
- Landscape Lighting



Features

Lumen Output	18L 1170 -36L 2340
Wattage	20-Watts - 40-Watts
Input Power	100 to 240 Volts
Efficacy	65 lm/W
Color Temperature (CCT)	3500K to 6500K
Color Rendering Index (CRI)	75
Beam Spread	15 - 30 -45Degs
Rated Life	50,000 Hrs
LEDs	18-36 X Cree High power
Housing	Die Cast Aluminium Toughened Glass
Mounting Options	BASE
Dimensions	18L= 170mm x 181mm 36L= 210mm x 194mm
Power Supply	350mA Constant Current Driver
Voltage	24 Volts
Warranty	2 Years
Environment	IP65
Approvals	CE Approved and ROHS Compliant






The Fountain Business Park Ellis Street Coatbridge ML5 3AA
Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
Phone: 07905 565604 Email: sales@edenillumination.com

Web: www.edenillumination.com

TREMOR

Light Distributions

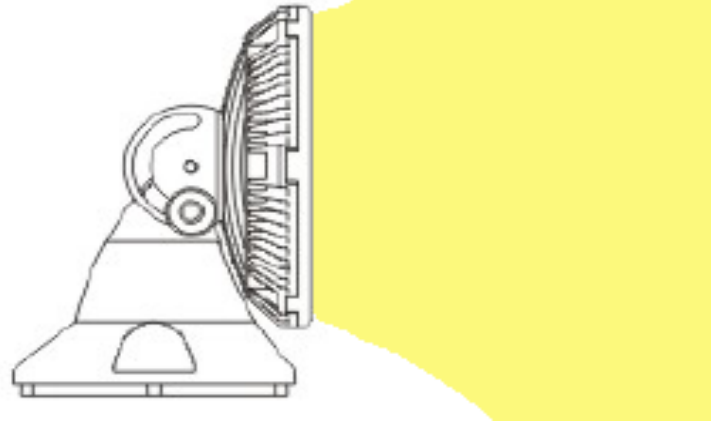

Weights & Thermal Data

Lamp Type	Weight (kg)	Minimum Operating Temp (-25°C)	Maximum Ambient Temp (50°C)
Led	18L = 2.5 36L = 3.17		

Available Light Output Colours



Order Details

Description Code	Beam Angle			LED Colour Option							
	15	30	45	Red	Green	Blue	Amber	Cool White	Neutral White	Warm White	RGB
	N	M	W	R	G	B	A	W	NW	WW	RGB
ED90-TREM-18	*			*							
ED90-TREM-36											

Example Order (*) ED90-TREM-18-N-R

We reserve the right to make changes at any time in order to maintain the highest product quality.

The Fountain Business Park Ellis Street Coatbridge ML5 3AA
Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
Phone: 07905 565604 Email: sales@edenillumination.com

Web: www.edenillumination.com



TREMOR REV-A SEP-2009