



Features

Lumen Output	1100 Lumens
Wattage	10-12-15-18Watt Customisable
Input Power	200 to 240 Volts
Efficacy	65 Lum/Watt
Color Temperature (CCT)	3100k - 6500k
Color Rendering Index (CRI)	85
Beam Spread	120Degs
Rated Life	50,000 Hrs
LEDs	CREE
Emergency Duration	3 Hrs
Battery	9.6V 4AH Ni-MH rechargeable battery
Charge time	< 12Hours
Housing	Aluminium-PC
Mounting Options	Surface
Dimensions	330-Dia x 90
Power Supply	350mA 12V
Warranty	5 Years
Environment	IP65
Approvals	CE Approved and ROHS Compliant




Applications

- Retail Lighting
- Restaurants, Bars and Hotels
- Architectural Lighting
- Display Lighting
- Energy Efficient - typically 30% more efficient than fluorescent luminaires
- Replaces 2D 28W fluorescent but only consumes 15W
- No through life maintenance
- 50 000 hrs life, 70% lumen maintenance
- Sealed to IP65
- No mercury, no disposal issues or costs

MIRA

Weights & Thermal Data

Lamp Type	Weight (kg)	Minimum Operating Temp (-20°C)	Maximum Ambient Temp (+50°C)
LED	1.05Kg		

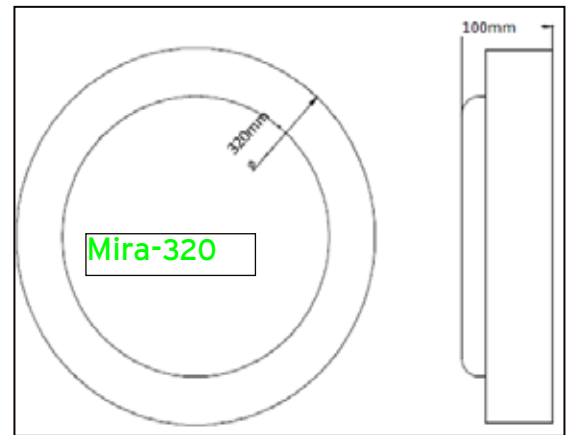

Order Details

Description Code	Product			Wattage				LED Colour Option		
	Standard	Sensor	Emergency	10W	12W	15W	18W	WarmWhite	Neutral White	Cool White
Mira	ST	SE	EM	10	12	15	18	WW	NW	CW
Mira										
*		*	*	*						*
Example Order ED84-Mira-SE-EM-10-CW										

We reserve the right to make changes at any time in order to maintain the highest product quality.

The Fountain Business Park Ellis Street Coatbridge ML5 3AA
 Phone: 07540 479985 Email: sales@edenillumination.com

The Studio 55 Castle Terrace Leven Fife KY8 5EU
 Phone: 07905 565604 Email: sales@edenillumination.com

Web: www.edenillumination.com

MIRA-REV-A OCT-2010

© Copyright www.edenilluminations.com

