



EMERGENCY LUMINAIRES WITH POWER LEDs

Double Easy LEDs Light



> The luminaires in the "Double Easy LEDs Light" series can be mounted easily on the ceiling or vertically on the wall, using special mounting accessories which are included in the package. They can be for double sided illumination or indication purposes.

- > Batteries Ni-Cd
- > Deep-discharge and over charge battery protection
- > TEST button
- > Charge indication LED
- > Produced in accordance with:
- > Capability of mounting installation with newly designed convex diffusers, a transparent (CRV) and a semi-transparent (OPAL).

- > Construction material: ABS, Polycarbonate.
- > Operation temperature range : 0 to 40 °C
- > Relative humidity: up-to 95%
- > Produced in accordance with: EN60598-1, EN60598-2-22



The self-adhesive legends below can be provided after order

Transparent self-adhesive legend included in the package



ED15-S-31100/S65L



ED15-S-31100/S65R



ED15-S-31100/S65D



Suitable for each direction

SELF-TESTING EMERGENCY LUMINAIRES WITH POWER LEDs

SELF-TESTING, MAINTAINED LUMINAIRES

TYPE	OPERATION VOLTAGE	CONSUMPTION	BATTERY	DURATION	LIGHT OUTPUT	WEIGHT
ED15-GR-390	220-240V AC/ 50-60Hz	7VA	3.6V / 1.5Ah	90 minutes	60lm / 115 lm	850 gr.
ED15-GR-392	220-240V AC/ 50-60Hz	7VA	3.6V / 3Ah	3 hours	60lm / 115lm	920 gr.

EMERGENCY LUMINAIRE FOR CBS

ED15-GR-394	220-240V AC/ 50-60Hz	7VA	-----	-----	70 lm	750 gr.
-------------	----------------------	-----	-------	-------	-------	---------


ACCESSORIES

ED15-A-100 Extension rod 40cm for ceiling installation

ED15-S-31100 Exit sticker

ED15-Á-2CRV Set of two convex diffusers, transparent with button

ED15-Á-2CRV/OPAL Set of two convex diffuser (OPAL) semi-transparent with button

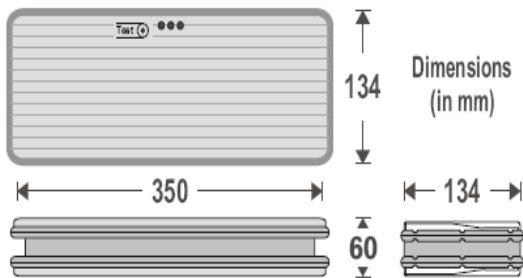

MOUNTING METHODS



CEILING MOUNTED



WALL MOUNTED

► Special accessory used for mounting and installation purposes. This accessory is included in the package. It is fastened on the suitable notches and has space for the connection terminal and cable.



A-2CRV - Set of two convex diffusers, transparent & button

► A-2CRV/OPAL Set of two convex diffuser (OPAL) semi-transparent & button

Example of mounting installation with convex diffuser

- See also the category EMERGENCY LIGHTING "Intelligent Easy LEDs Light".
- Mounting installation with newly designed convex diffusers, transparent (CRV) & semi-transparent (OPAL).



LEDs of high luminosity



90 minutes / 3 hours



Ni-Cd 3.6V/1.5Ah 3.6V/3Ah



22 Metres



3 years guarantee (1 year for battery)



EN ISO 9001 : 2000



We reserve the right to make changes at any time in order to maintain the highest product quality.