



## EMERGENCY LUMINAIRES WITH POWER LEDs

### Comfort LEDs Light



> The luminaires in the "Double Easy LEDs Light" series can be mounted easily on the ceiling or vertically on the wall, using special mounting accessories which are included in the package. They can be for double sided illumination or indication purposes.

- > Batteries Ni-Cd
- > Deep-discharge and over charge battery protection
- > Charge indication LED
- > TEST button

- > Construction material: ABS, Polycarbonate.
- > Operation temperature range : 0 to 40 °C
- > Relative humidity: up-to 95%
- > Produced in accordance with: ÅÍ60598-1, ÅÍ60598-2-22



The self-adhesive legends below can be provided after order



ED15-S-10800/S65L

ED15-S-10800/S65R

ED15-S-10800/S65D

## EMERGENCY LUMINAIRES WITH LEDs FOR INTERIOR USE

### NON-MAINTAINED EMERGENCY LUMINAIRES

TYPE	OPERATION VOLTAGE	CONSUMPTION	BATTERY	DURATION	LIGHT OUTPUT	WEIGHT
ED15-GR-408/3L	220-240V AC/ 50-60Hz	3VA	4.8/1.5Ah Ni-Cd	2 hours	75 lm	810 gr.
ED15-GR-408/6L	220-240V AC/ 50-60Hz	3VA	4.8/3Ah Ni-Cd	2 hours	150 lm	1020 gr.
ED15-GR-409/3L	220-240V AC/ 50-60Hz	3VA	4.8/3Ah Ni-Cd	3 hours	75 lm	1010 gr.
ED15-GR-409/6L	220-240V AC/ 50-60Hz	4VA	4.8/4Ah Ni-Cd	3 hours	150lm	1060 gr.

### SELF-TESTING, MAINTAINED EMERGENCY LUMINAIRES



ED15-GR-421/3L	220-240V AC/ 50-60Hz	6.5VA	4.8/1.5Ah Ni-Cd	2 hours	75 / 75 lm	560 gr.
ED15-GR-421/6L	220-240V AC/ 50-60Hz	7VA	3.6/3Ah Ni-Cd	2 hours	75 / 150 lm	630 gr.
ED15-GR-423/3L	220-240V AC/ 50-60Hz	6.5VA	3.6/3Ah Ni-Cd	4 hours	75 / 75 lm	620 gr.
ED15-GR-423/6L	220-240V AC/ 50-60Hz	7VA	3.6/4Ah Ni-Cd	3 hours	75 / 150 lm	670 gr.

### LUMINAIRES FOR CBS

ED15-GR-414/3L	110V-240V AC/DC	4VA	-----	-----	75 lm	400 gr.
ED15-GR-414/6L	110V-240V AC/DC	6VA	-----	-----	150 lm	400 gr.

### ACCESSORIES

- ED15-Á-3018 Suspended ceiling mounting springs
- ED15-SP-115 Double sided marking panel (PVC 6mm.)
- ED15-S-10800 Exit sticker 195x90mm for the "Comfort Light" series

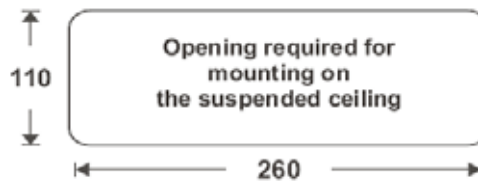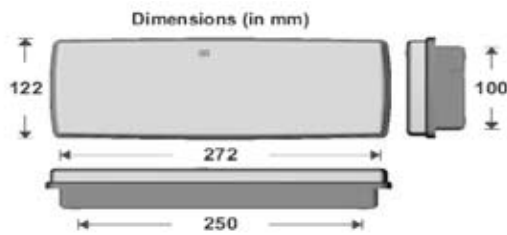


ED15-SP-115



ED15-Á-3018



Define during the order of the sign ED15-SP-115 the required direction: left, right or down.

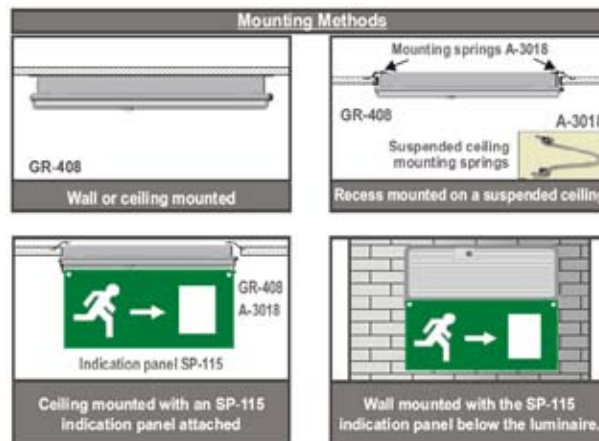

LEDs of high luminosity



90 minutes  
2 hours  
3 hours  
4 hours



Ni-Cd  
3.6/1.5Ah,  
3.6/3Ah,  
Ni-MH  
3.6/4Ah



20 Metres



3 years guarantee  
(1 year for battery)



We reserve the right to make changes at any time in order to maintain the highest product quality.